

THE NEVERLEAK COMPANY, LP


P.O. BOX 1397, OLIVE BRANCH, MS 38654 (662) 893-8190
TOLL FREE 1-800-274-2409 TOLL FREE FAX 1-800-876-6376
www.neverleakcompany.com

SPECIFICATION SUBMITTAL SHEET

NEVA-CALK™ GALVANIZED BASE ROOF FLASHINGS

SPECIFICATION:

Hot dipped galvanized steel, chemically treated. Commercial quality, heavy gauge material for strength and workability. An EPDM collar is mechanically locked to the base to form a one-piece assembly. All made from prime/virgin materials.

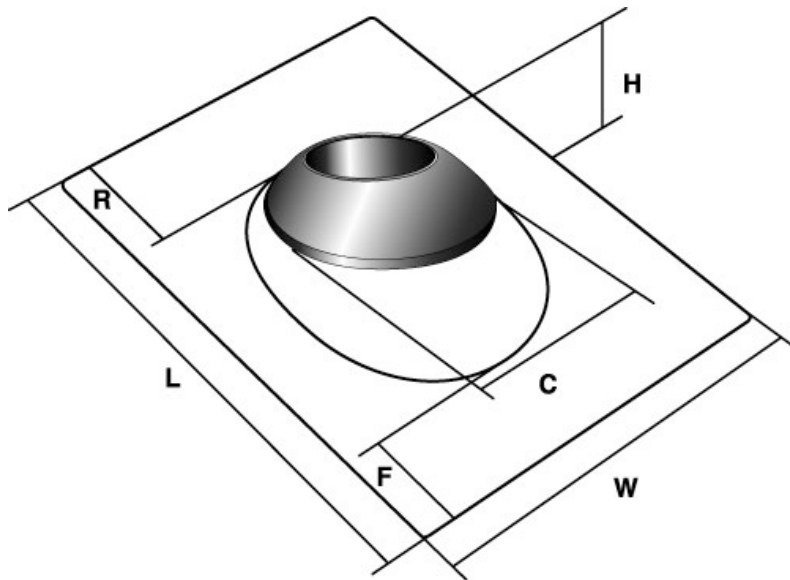

Roof Flashing Dimensional Characteristics							
Stock#	Pipe Size	Dim. W	Dim. L	Dim R	Dim. F	Dim. C	Dim. H
GNC15	1.5"	8.75	12.625"	3.625"	2.25"	4.25"	2.125"
GNC20	2"	8.75"	12.625"	3.625"	2.25"	4.25"	2.125"
GNC30	3"	10.75"	14.5"	4.5"	2.5"	5.5"	2.625"
GNC40	4"	11.75"	15.5"	4.5"	2.5"	6.5"	2.375"

ASTM INFORMATION:

Galvanized Steel:

ASTM A 653/A 653M

EPDM Collar:

Durometer hardness Shore A-60; ASTM D2000; BC 610

***Do not use petroleum base mastics, sealing compounds or paints on collar!**