



**Neverleak
Company LP**

ROOF FLASHINGS SINCE 1943



PRODUCT CATALOG



QUALITY PRODUCTS AT AN EXCELLENT PRICE

Neverleak Company, LP is a third generation family owned business since 1943. We offer quality, time-tested roof flashing products at excellent prices, and a team of knowledgeable sales representatives ready to serve.

CONTENTS

Aluminum & Galvanized Base Flashings.....	P1
NEW All In One & Mini Fit Flashings.....	P2
Powder Coated Neva-Calk Flashings.....	P3
Copper Base Flashings & Repair Collars.....	P4
Premium & Super Neo-Poly Flashings.....	P5
Electrical Mast Connection (EMC).....	P6
Residential Master Flash & Retrofit.....	P7
Master Flash.....	P8
Lead Goods.....	P9
Ordering & Shipping.....	P9



AI

ANC Series

ALUMINUM BASE FLASHINGS

- Commercially pure aluminum base
- 3003 O Temper
- .025 thickness
- Rust resistant
- A.S.T.M. B209
- Premium Elastomeric Collar
- Excellent ozone resistance
- Improved UV resistance
- Collar rated 180°F continuous heat
- Approved for Type B installations
- Fits up to 40° roof pitch
- Not for hot-mopped or built-up applications
- Made in the USA
(For higher temperatures, see our Silicone Residential Master Flash)

PART	PIPE SIZE	BASE SIZE	Ctn. Wt.
ANC15	1-1/4" - 1-1/2"	8-3/4" X 12-5/8"	5#
ANC20	2"	8-3/4" X 12-5/8"	5#
ANC30	3"	10-3/4" X 14-1/2"	7#
ANC40	4"	11-3/4" X 15-1/2"	8#
AN123	1-1/4" - 2" - 3"	10-3/4" X 14-1/2"	7#
AN340	3" - 4"	11-3/4" X 15-1/2"	8#

SI

GNC Series

GALVANIZED BASE ROOF FLASHINGS

- Hot dipped galvanized steel, chemically treated
- 26 gauge-G90 zinc coating
- Corrosion resistant
- A.S.T.M. A 653/A 653M
- Premium Elastomeric Collar
- Excellent ozone resistance
- Improved UV resistance
- Collar rated 180°F continuous heat
- Approved for Type B installations
- Fits up to 40° roof pitch
- Not for hot-mopped or built-up applications
- Made in the USA
(For higher temperatures, see our Silicone Residential Master Flash)

PART	PIPE SIZE	BASE SIZE	Ctn. Wt.
GNC15	1-1/4" - 1-1/2"	8-3/4" x 12-5/8"	9#
GNC20	2"	8-3/4" x 12-5/8"	9#
GNC30	3"	10-3/4" x 14-1/2"	13#
GNC40	4"	11-3/4" x 15-1/2"	14#
GN123	1-1/4" - 2" - 3"	10-3/4" x 14-1/2"	13#
GN340	3" - 4"	11-3/4" x 15-1/2"	15#

ES ICC-ES Approved
Report # ESR-1987

Warranty for the life of the roof.
Warranty and Suggested Installation sheet inside every carton.

**Using petroleum based mastics, sealing compounds or paints on all collars will void our warranty.*

NEW

ALUMINUM and GALVANIZED ALL-IN-ONE NEVA-CALK SERIES

- Premium Elastomeric collar with excellent ozone resistance
- Collar rated 180° F continuous heat
- Approved for Type B installations
- Warranty / Suggested installation sheet inside every carton
- Made in the USA
- Not for hot-mopped or built-up roof applications

(For higher temperatures, see our Silicone Residential Master Flash)

Warranty for the Life of the Roof

ALL-IN-ONE SERIES FITS PIPE SIZES 1 - 1/2" - 2" - 3" - 4"

→ ALUMINUM BASE MAXI-FIT FLASHINGS

PART	PIPE SIZE	BASE SIZE	Ctn. Wt.
AN104	1 - 1/2" - 2" - 3" - 4"	11-3/4" x 15-1/2"	9#

→ GALVANIZED BASE MAXI-FIT FLASHINGS

PART	PIPE SIZE	BASE SIZE	Ctn. Wt.
GN104	1 - 1/2" - 2" - 3" - 4"	11-3/4" x 15-1/2"	16#

ALUMINUM and GALVANIZED MINI-FIT NEVA-CALK SERIES

MINI-FIT SERIES FITS PIPE SIZES 1 - 1/2" - 2"

→ ALUMINUM BASE MINI-FIT FLASHINGS

PART	PIPE SIZE	BASE SIZE	Ctn. Wt.
AN102	1 - 1/2" - 2"	8-3/4" X 12-5/8"	5#

→ GALVANIZED BASE MINI-FIT FLASHINGS

PART	PIPE SIZE	BASE SIZE	Ctn. Wt.
GN102	1 - 1/2" - 2"	8-3/4" X 12-5/8"	10#

Warranty for the life of the roof.

Warranty and Suggested Installation sheet inside every carton.

**Using petroleum based mastics, sealing compounds or paints on all collars will void our warranty.*

Powdercoated Series NEVA-CALK FLASHINGS

- Available in Aluminum or Galvanized base Multi-fit sizes only
- Matte Textured finish in Black, Cocoa (Brown) or Grey
- Premium Elastomeric Collar
- Excellent ozone resistance
- Improved UV resistance
- Collar Rated 180°F continuous heat
- Approved for Type B installations
- Fits up to 40° roof pitch
- Not for hot-mopped or built-up applications.
- Made in the USA



→ ALUMINUM BASE MULTI-FIT FLASHINGS

COLOR	PART	Ctn. Wt.	PIPE SIZE
BLACK	AN123-B	7#	10-3/4" x 14-1/2"
COCOA	AN123-C	7#	10-3/4" x 14-1/2"
GREY	AN123-G	7#	10-3/4" x 14-1/2"
BLACK	AN340-B	8#	11-3/4" x 15-1/2"
COCOA	AN340-C	8#	11-3/4" x 15-1/2"
GREY	AN340-G	8#	11-3/4" x 15-1/2"
BLACK	AN104-B	9#	11-3/4" x 15-1/2"
COCOA	AN104-C	9#	11-3/4" x 15-1/2"
GREY	AN104-G	9#	11-3/4" x 15-1/2"

→ GALVANIZED BASE MULTI-FIT FLASHINGS

COLOR	PART	Ctn. Wt.	PIPE SIZE
BLACK	GN123-B	13#	10-3/4" x 14-1/2"
COCOA	GN123-C	13#	10-3/4" x 14-1/2"
GREY	GN123-G	13#	10-3/4" x 14-1/2"
BLACK	GN340-B	15#	11-3/4" x 15-1/2"
COCOA	GN340-C	15#	11-3/4" x 15-1/2"
GREY	GN340-G	15#	11-3/4" x 15-1/2"
BLACK	GN104-B	16#	11-3/4" x 15-1/2"
COCOA	GN104-C	16#	11-3/4" x 15-1/2"
GREY	GN104-G	16#	11-3/4" x 15-1/2"

Warranty for the life of the roof.
Warranty and Suggested Installation sheet inside every carton.



ICC-ES only on AN123, GN123, AN340 and GN340 powder coated flashings on this page.

**Using petroleum based mastics, sealing compounds or paints on all collars will void our warranty.
12 per carton and Warranty and Suggested Installation sheet inside every carton.*

CU

CNC Series

COPPER BASE FLASHINGS



- 16 ounce dead soft 99.9% pure copper base
- A.S.T.M. B-370 152M – 00
- Premium Elastomeric Collar
- Excellent ozone resistance
- Improved UV resistance
- Collar rated 180°F continuous heat
- Approved for Type B installations
- Fits up to 40° roof pitch
- Not for hot-mopped or built-up applications
- Made in the USA

(For higher temperatures, see our Silicone Residential Master Flash)

PART	PIPE SIZE	BASE SIZE	Ctn. Wt.
CNC30	3"	10-3/4" X 14-1/2"	13#
CNC40	4"	11-3/4" X 15-1/2"	16#
CN123	1-1/4" - 2", 3"	10-3/4" X 14-1/2"	13#
CN340	3" - 4"	11-3/4" X 15-1/2"	17#



12 per carton and Warranty and Suggested Installation sheet inside every carton.

**Using petroleum based mastics, sealing compounds or paints on all collars will void our warranty.*

RC SERIES

REPAIR COLLARS

- Neva-Calk repair collars are produced from the same premium elastomeric material as all other Neverleak products
- Excellent ozone resistance
- Improved UV resistance
- Exceptional weathering coupled with water resistance
- Requires no mastics or tools for a quick and easy repair

➔ **INSTALLATION INSTRUCTIONS:** Place the repair collar over the pipe and push down on top of the old collar. There is no need for caulking.

PART	PIPE SIZE	Ctn. Qty.
RC123	1-1/4" - 2", 3"	25/50/100
RC340	3" - 4"	25/50



• Collar displays free of charge

Warranty for the life of the roof.


**Using petroleum based mastics, sealing compounds or paints on all collars will void our warranty.*

PNP NEVA-CALK SERIES

PREMIUM NEO-POLY

→ TRADITIONAL PITCH FITS
FLAT TO 12/12 PITCH (45°)

- Stiffer thermoplastic hard base
- Premium elastomer collar
- Excellent weathering and ultraviolet stabilization
- Flat surface dimensions still identical to the competition
- Life of roof warranty
- Not for hot-mopped or built-up roof applications
- Made in the USA

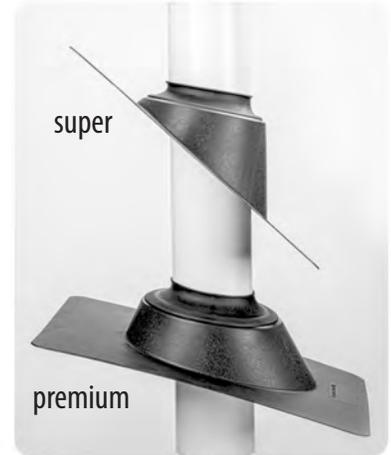

PART	PIPE SIZE	BASE SIZE	Ctn. Wt.
PNPF30	3"	10-3/4" x 14-1/2"	6#
PNPF40	4"	11-7/8" x 15-1/2"	8#
PNP123	1.25" - 2" - 3"	10-3/4" x 14-1/2"	6#
PNP340	3" - 4"	11-7/8" x 15-1/2"	8#

SNP NEVA-CALK SERIES

SUPER NEO-POLY

→ STEEP PITCH FITS FLAT TO 15/12 PITCH (51°)

- Stiffer thermoplastic hard base
- Premium elastomer collar
- Excellent weathering and ultraviolet stabilization
- Pitched neck design allows for reduction in length
- Fits more roof pitches than other flashings at a standard price
- Not for hot-mopped or built-up roof applications.
- Made in the USA

PART	PIPE SIZE	BASE SIZE	Ctn. Wt.
SNPF15	1-1/4" - 1-1/12"	8-7/8" x 11-3/4"	4#
SNPF20	2"	8-7/8" x 11-3/4"	4#
SNPF30	3"	10-3/4" x 13-5/8"	6#
SNPF40	4"	12-3/8" x 15-1/4"	8#
SNP123	1-1/4" - 2" - 3"	10-3/4" x 13-5/8"	6#
SNP340	3" - 4"	12-3/8" x 15-1/4"	8#

Warranty for the life of the roof.

*Using petroleum based mastics, sealing compounds or paints on all collars will void our warranty.



ICC-ES on Super Neo-Poly only

12 per carton and Warranty and Suggested Installation sheet inside every carton.

ELECTRICAL MAST CONNECTION MASTERFLASH®



SPECIFICALLY DESIGNED FOR THE
RESIDENTIAL ROOFING INDUSTRY

ISO Quality, Price & Availability / ONE COMPOUND

ADVANCED OZONE RESISTANCE tested to: EPDM 70 hour @ 500 ppm

HIGH TEMP RESISTANCE tested to:

Intermittent + 135° C (+275° F)

Continuous + 100° C (+212° F)

LOW TEMP RESISTANCE tested to:

- 55° C (-67° F)


COMPRESSION SET minimum:

25%



▼ Hassle stainless steel gripper to ensure retrofit application

Additional grippers
3 piece set available for purchase ▶

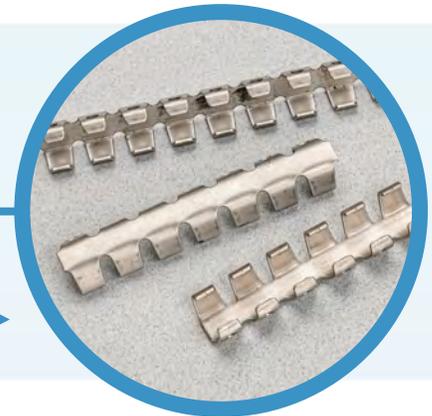

- ➔ **Aluminum Strip:** allows nails to hold edge down without buckling
- ➔ **Weather Protection Made of E.P.D.M. :** These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.
- ➔ **Built-in 20° pitch:** allows adaptability to almost any roof pitch including 45°
- ➔ **Modification Made Simple:** Easy to see pipe diameters make for painless on-site installation.

Electrical Mast Connection

PIPE SIZE / FLASHING DETAILS	COMPOUND	PART
0"-5-3/8" (0 - 136 mm) Base dimensions 15" (381mm)	EPDM	EMC

THE ELECTRICAL MAST CONNECTION MASTER FLASH® IS A ONE PIECE FLASHING CLOSED WITH STAINLESS STEEL GRIPPERS



1. Measure for correct pipe size
2. Apply shingles up to lower edge of pipe
3. Cut EMC flashing opening to appropriate size for your pipe
4. Wrap EMC flashing around pipe and close by crimping on stainless steel grippers
5. Apply silicone based sealant to the underside of EMC base and secure base with roofing nails
6. Apply silicone based sealant around the top of the EMC flashing where it meets the pipe, and along joiner seam
7. Finish applying shingles over sides and upper portion of the EMC flashing

Note: Properly installed the lower approximately 1/3" (8.4mm) of the EMC base will be on the top of the shingles and the upper approximately 2/3" (16.9mm) of the EMC base will be covered by the shingles

RESIDENTIAL MASTER FLASH®



→ Silicone Red



→ EPDM Black

20
YEAR
WARRANTY



- Built in 20° pitch allows adaptability to almost any roof pitch including 45°
- Clearly marked designation of pipe diameter takes the guess work out of sizing
- Environmentally safe lead free aluminum base

Visit www.aztecwasher.com for warranty information

PART	PIPE SIZE	BASE SIZE	COMPOUND	Ctn. Qty.
MINI RES	1/4" - 3"	14" x 18"	Black EPDM	10
MINI-S	1/4" - 3"	14" x 18"	Red Silicone	10
RES #1	3" - 8"	20" x 24"	Black EPDM	10
RES #1-S	3" - 8"	20" x 24"	Red Silicone	10
RES #2	8" - 11"	26" x 30"	Black EPDM	10
RES #2-S	8" - 11"	26" x 30"	Red Silicone	10
RES #3	11" - 18"	35" x 35"	Black EPDM	5
RES #3-S	11" - 18"	35" x 35"	Red Silicone	5

RETROFIT®

- Use when over the top installation is not an option.
- Available in EPDM or Silicone (for high temperature application, use silicone).
- Includes cable clamp and snap rivets



↑ EPDM Grey



↑ Silicone Red

PART	PIPE SIZE	Ctn. Qty.	COMPOUND	Ctn. Wt.
101RF	1/2" - 4"	5	Grey EPDM	6#
102RF-S	1/2" - 4"	5	Red Silicone	6#
201RF	4" - 9-1/4"	5	Grey EPDM	8#
202RF-S	4" - 9-1/4"	5	Red Silicone	8#
301RF	9-1/4" - 16-1/4"	5	Grey EPDM	14#
302RF-S	9-1/4" - 16-1/4"	5	Red Silicone	14#

20
YEAR
WARRANTY



* For installation instructions visit www.neverleak.biz Retro-Fit page

MASTER FLASH®



→ Silicone Red



→ EPDM Grey


20
YEAR
WARRANTY



- Engineered for profiled roofing materials
- The base is designed to form a seal on any metal panel configuration and roof pitch
- Cut opening 20% smaller than the pipe outside diameter (OD) to get a compression seal.
- Compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light
- Master Flash is easily customized with a sharp knife

Master Flash® , Residential Master Flash® and Retrofit® are registered trademarks of Aztec Washer Company.

PART	PIPE SIZE	BASE SIZE	COMPOUND	Ctn. Qty.
MINI	1/8" - 3/4"	2-1/4"	EPDM/Silicone	30
#1	1/4" - 2-3/4"	4-1/4"	EPDM/Silicone	15
#2	7/8" - 4"	6"	EPDM/Silicone	15
#3	1/4" - 5-3/4"	8"	EPDM/Silicone	15
#4	2-3/4" - 7"	10"	EPDM/Silicone	10
#5	4" - 8-1/4"	11"	EPDM/Silicone	10
#6	4-3/4" - 10"	12"	EPDM/Silicone	10
#7	5-1/2" - 11-1/2"	14"	EPDM/Silicone	10
#8	6-3/4" - 13-1/2"	17"	EPDM/Silicone	5
#9	9-1/2" - 20-1/2"	25"	EPDM/Silicone	5
MAXI	12" - 28-1/2"	34"	EPDM/Silicone	5



SIZING CHART FOR MASTER FLASH®

Check diameter of pipe. Select the appropriate Master Flash® for pipe or duct diameter. For extreme pitch or surface irregularity select next larger size.

PART	PIPE SIZE	COMPOUND	COMPOUND	A Top Opening Diameter	B Cut to suit pipe size	C Base Dimensions
Mini	1/8" - 3/4" (3mm to 19mm)	EPDM	Silicone	CLOSED	1/8" - 3/4"	2-1/4"
#1	1/4" - 2-3/4" (6mm to 70mm)	EPDM	Silicone	CLOSED	1/4" - 2-3/4"	4-1/2"
#2	7/8" - 4" (22mm to 101mm)	EPDM	Silicone	7/8"	7/8" - 4"	6"
#3	1/4" - 5-3/4" (6mm to 146mm)	EPDM	Silicone	CLOSED	1/4" - 5-3/4"	8"
#4	2-3/4" - 7" (76mm to 177mm)	EPDM	Silicone	2-3/4"	2-3/4" - 7"	10"
#5	4" - 8-1/4" (101mm to 209mm)	EPDM	Silicone	4"	4" - 8-1/4"	11"
#6	4-3/4" - 10" (121mm to 254mm)	EPDM	Silicone	4-3/4"	4-3/4" - 10"	12"
#7	5-1/2" - 11-1/2" (140mm to 292mm)	EPDM	Silicone	5-1/2"	5-1/2" - 11-1/2"	14"
#8	6-3/4" - 13-1/2" (171mm to 343mm)	EPDM	Silicone	6-3/4"	6-3/4" - 13-1/2"	17"
#9	9-1/2" - 20-1/2" (254mm to 520mm)	EPDM	Silicone	9-1/2"	9-1/2" - 20-1/2"	25"
MAX	12" - 28-1/2" (304mm to 724mm)	EPDM	Silicone	12"	12" - 28-1/2"	34"

ISO Quality, Price & Availability / TWO COMPOUNDS

ADVANCED OZONE RESISTANCE tested to: EPDM 70 hour @ 500 pphm Silicone 70 hour @ 500 pphm

HIGH TEMP RESISTANCE tested to:

Intermittent	+ 135° C (+275° F)	+ 260° C (+500° F)
Continuous	+ 100° C (+212° F)	+ 225° C (+437° F)

LOW TEMP RESISTANCE tested to:

- 55° C (-65° F)	- 74° C (-100° F)
------------------	-------------------

TENSILE STRENGTH minimum:

10 MPa (1450 psi)	5 MPa (700 psi)
-------------------	-----------------

COMPRESSION SET maximum:

25%	50%
-----	-----

*Complete application data and testing methods are available upon request.



LEAD GOODS

We stock a limited variety of lead flashings, sheet lead, lead wool and ingot lead. Please call for inquiries.

ORDERING & SHIPPING

TOLL FREE: 800-274-2409 | TOLL FREE FAX: 800-876-6376



RELIABLE ROOFING PRODUCTS

ICC-ES Code Approval

We are a proud member of International Code Council Evaluation Services (ICC-ES) since 2008. The ICC-ES replaced building codes such as BOCA, SBCCI and NES in October 2003.

Our products went through strenuous testing to receive ICC-ES code approval and we offer a life of roof limited warranty. A copy of our written warranty is on our website and included in every carton.



EXCELLENT CUSTOMER SERVICE

We're Ready When You Are

We have a team of knowledgeable sales representatives actively calling on our customers. Order confirmations are provided with every order.

VISIT US ONLINE @ NEVERLEAK.BIZ



NEVERLEAK.BIZ | TOLL FREE: 800-274-2409 | TOLL FREE FAX: 800-876-6376